




TUBIFLESSIBILI

CURVASIL135 - POLI

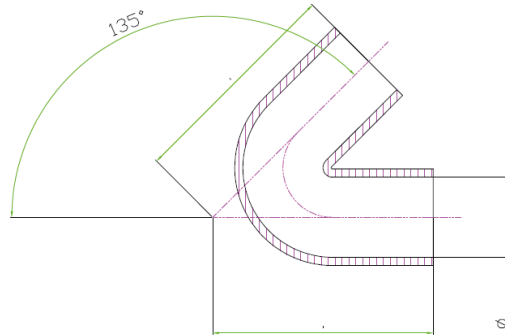

STRUCTURE

135° Elbows made of VMQ (Vinyl Methyl Quality) silicone, with polyester reinforcement. Possibility to be supplied with Fluorosilicone liner (FVMQ) or silicone oil resistant, and/or aramidic fibers reinforcements (Nomex®, Kevlar®, etc.)

TEMPERATURE RANGE

-55 °C / +180 °C with peaks to + 200 °C

COLOUR

Blue, other on request

APPLICATION

Cooling systems for passenger cars, motorbikes, excavators, industrial vehicles, buses and general industrial systems. Turbocharger and intercooler systems

							
Article ID	Inner diameter (mm)	Wall thickness (mm)	Reinforcement number	Wall thickness tolerance (mm)	Burst pressure (bar)	Hardness (Shore A)	Length (mm)
SBP13500600615G	6,5	4,0	3	+1 / -0,5	45	65 - 75	200
SBP13500800815G	8	4,0	3	+1 / -0,5	45	65 - 75	200
SBP13501001015G	9,5	4,0	3	+1 / -0,5	35	65 - 75	200
SBP13501101115G	11	4,0	3	+1 / -0,5	35	65 - 75	200
SBP13501301315G	13	4,0	3	+1 / -0,5	35	65 - 75	200
SBP13501601615G	16	4,0	3	+1 / -0,5	30	65 - 75	200
SBP13501901915G	19	4,0	3	+1 / -0,5	28	65 - 75	200
SBP13502202215G	22	4,0	3	+1 / -0,5	19,3	65 - 75	200
SBP13502502515G	25	4,0	3	+1 / -0,5	19,3	65 - 75	200
SBP13502802815G	28	4,5	3	+1 / -0,5	19,3	65 - 75	200
SBP13503003015G	30	4,5	3	+1 / -0,5	15,4	65 - 75	200
SBP13503203215G	32	4,5	3	+1 / -0,5	15,4	65 - 75	200

Tubi Flessibili S.r.l. - Tel: +39 0131238971 - Email: info@tubiflessibili.net

According to ISO 1307/ SAE J20

Above technical data are referring to applications at a room temperature (+20°C)

Copyright © TUBI FLESSIBILI S.r.l. - All rights reserved. The texts and images are property of Tubi Flessibili S.r.l.
Even partial reproduction of the catalog is prohibited.





TUBIFLESSIBILI

							
Article ID	Inner diameter (mm)	Wall thickness (mm)	Reinforcement number	Wall thickness tolerance (mm)	Burst pressure (bar)	Hardness (Shore A)	Length (mm)
SBP13503503515G	35	4,5	3	+1 / -0,5	15,4	65 - 75	200
SBP13503503815G	38	4,5	3	+1 / -0,5	15,4	65 - 75	200
SBP13504004015G	40	4,5	3	+1 / -0,5	15,4	65 - 75	200
SBP13504204215G	42	4,5	3	+1 / -0,5	15,4	65 - 75	200
SBP13504504515G	45	4,5	3	+1 / -0,5	14	65 - 75	200
SBP13504804815G	48	4,5	3	+1 / -0,5	14	65 - 75	200
SBP13505105115G	51	5,0	4	+1 / -0,5	14	65 - 75	200
SBP13505305315G	53	5,0	4	+1 / -0,5	14	65 - 75	200
SBP13505505515G	55	5,0	4	+1 / -0,5	13	65 - 75	200
SBP13505705715G	57	5,0	4	+1 / -0,5	12	65 - 75	200
SBP13506006015G	60	5,0	4	+1 / -0,5	10	65 - 75	200
SBP13506306315G	63	5,0	4	+1 / -0,5	10	65 - 75	200
SBP13506506515G	65	5,0	4	+1 / -0,5	10	65 - 75	200
SBP13506806815G	68	5,0	4	+1 / -0,5	8	65 - 75	200
SBP13507007015G	70	5,0	4	+1 / -0,5	8	65 - 75	200
SBP13507607615G	76	5,5	5	+1 / -0,5	8	65 - 75	200
SBP13508008015G	80	5,5	5	+1 / -0,5	8	65 - 75	200
SBP13508308315G	83	5,5	5	+1 / -0,5	5,5	65 - 75	200
SBP13508908915G	89	5,5	5	+1 / -0,5	5,5	65 - 75	200
SBP13510210215G	102	5,5	5	+1 / -0,5	5	65 - 75	200
SBP13511411415G	114	5,5	5	+1 / -0,5	5	65 - 75	200
SBP13512712715G	127	5,5	5	+1 / -0,5	5	65 - 75	200
SBP13515215215G	152	5,5	5	+1 / -0,5	5	65 - 75	200

Tubi Flessibili S.r.l. - Tel: +39 0131238971 - Email: info@tubiflessibili.net

According to ISO 1307/ SAE J20

Above technical data are referring to applications at a room temperature (+20°C)

Copyright © TUBI FLESSIBILI S.r.l. - All rights reserved. The texts and images are property of Tubi Flessibili S.r.l.
Even partial reproduction of the catalog is prohibited.

