


## LIPARI (PVC) LIGHT

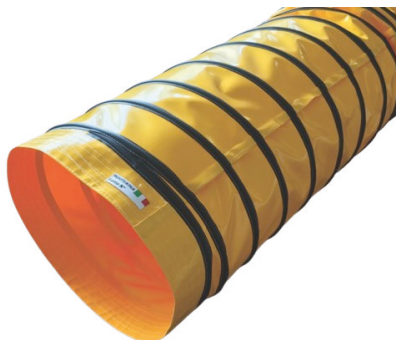

### STRUCTURE

Flexible ducting made of one polyester fabric both sides PVC coated, external metal wire sewn onto the wall with a polyester black scuffstrip. Each end with reinforced and helix-free cuff

### APPLICATION

These ductings are specially designed for mobile heaters for winter-building, grain-drying, hall and tent-heating, stable ventilation, welding gas extraction, green house heating, tank cleaning. Very good compressable, can be supplied without wire as lay flat hose. Alternatively available with wire free cuffs or endrings, suspension hooks and eyelat holes. Endless combinable with endrings and quick coupling

### TEMPERATURE RANGE

-20 °C/+90 °C in +20 °C ambient

### COLOUR

Grey, with black scuffstrip

### DIAMETERS

From 102 mm up to 1.200 mm

### STANDARD LENGTH

On request

|  |  |  |  |  |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Internal diameter (mm)                                                              | Wire pitch (mm)                                                                     | Theoretical bending radius (mm)                                                     | Working pressure (bar)                                                               | Vacuum (bar)                                                                          |
| 102                                                                                 | 50 ÷ 150                                                                            | 0,5                                                                                 | 0,25                                                                                 | 0,03                                                                                  |
| 127                                                                                 | 50 ÷ 150                                                                            | 0,5                                                                                 | 0,25                                                                                 | 0,03                                                                                  |
| 152                                                                                 | 50 ÷ 150                                                                            | 0,5                                                                                 | 0,25                                                                                 | 0,03                                                                                  |
| 160                                                                                 | 50 ÷ 150                                                                            | 0,5                                                                                 | 0,25                                                                                 | 0,03                                                                                  |
| 178                                                                                 | 50 ÷ 150                                                                            | 0,5                                                                                 | 0,25                                                                                 | 0,03                                                                                  |
| 203                                                                                 | 50 ÷ 150                                                                            | 0,5                                                                                 | 0,25                                                                                 | 0,03                                                                                  |
| 220                                                                                 | 50 ÷ 150                                                                            | 0,5                                                                                 | 0,25                                                                                 | 0,027                                                                                 |
| 229                                                                                 | 50 ÷ 150                                                                            | 0,5                                                                                 | 0,25                                                                                 | 0,025                                                                                 |
| 254                                                                                 | 50 ÷ 150                                                                            | 0,5                                                                                 | 0,25                                                                                 | 0,02                                                                                  |
| 305                                                                                 | 50 ÷ 150                                                                            | 0,5                                                                                 | 0,20                                                                                 | 0,02                                                                                  |





# TUBIFLESSIBILI

|  |  |  |  |  |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Internal diameter<br>(mm)                                                         | Wire pitch<br>(mm)                                                                | Theoretical bending<br>radius<br>(mm)                                             | Working pressure<br>(bar)                                                          | Vacuum<br>(bar)                                                                     |
| 356                                                                               | 50 ÷ 150                                                                          | 0,5                                                                               | 0,175                                                                              | 0,02                                                                                |
| 380                                                                               | 50 ÷ 150                                                                          | 0,5                                                                               | 0,175                                                                              | 0,02                                                                                |
| 407                                                                               | 50 ÷ 150                                                                          | 0,5                                                                               | 0,175                                                                              | 0,02                                                                                |
| 425                                                                               | 50 ÷ 150                                                                          | 0,5                                                                               | 0,15                                                                               | 0,02                                                                                |
| 457                                                                               | 50 ÷ 150                                                                          | 0,5                                                                               | 0,15                                                                               | 0,02                                                                                |
| 508                                                                               | 50 ÷ 150                                                                          | 0,5                                                                               | 0,15                                                                               | 0,02                                                                                |
| 525                                                                               | 50 ÷ 150                                                                          | 0,5                                                                               | 0,12                                                                               | 0,018                                                                               |
| 600                                                                               | 50 ÷ 150                                                                          | 0,5                                                                               | 0,10                                                                               | 0,018                                                                               |
| 760                                                                               | 50 ÷ 150                                                                          | 0,5                                                                               | 0,08                                                                               | 0,018                                                                               |

