




TUBIFLESSIBILI

TFN2

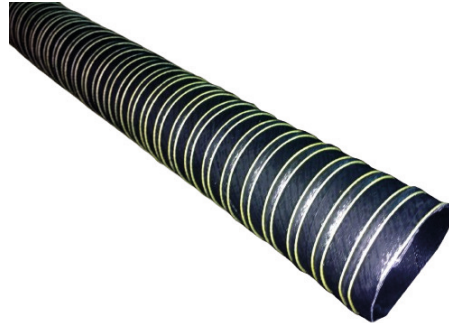

MATERIAL

Double ply neoprene coated both sides fiberglass cloth, internal wire and double external glass tension cord

APPLICATION

This extremely light-weight flexible ducting is excellent for the distribution and extraction of air, fumes and light powders where high temperatures are present

TEMPERATURE RANGE

- 45 °C / +125 °C, peaks of 150 °C

COLOUR

Black, white cord

STANDARD LENGTHS:

4 meters

NOTES:

It is possible to supply the hose in cutted lengths, with cuffed ends, without metal wire for an easy connection or eventually enlarged

				
Article ID	Inner diameter (mm)	Bending radius (mm)	Working pressure (bar)	Vacuum (mm H ₂ O)
TFN20013-0000B	13	13	2,50	7000
TFN20016-0000B	16	16	2,50	7000
TFN20018-0000B	18	18	2,50	7000
TFN20019-0000B	19	19	2,50	7000
TFN20022-0000B	22	22	2,50	7000
TFN20025-0000B	25	25	2,50	7000
TFN20028-0000B	28	28	2,50	5800
TFN20030-0000B	30	30	2,50	5800
TFN20032-0000B	32	32	2,50	5800
TFN20035-0000B	35	35	2,40	5800
TFN20038-0000B	38	38	2,40	5800
TFN20040-0000B	40	40	2,40	5800
TFN20042-0000B	42	42	2,40	5800

Tubi Flessibili S.r.l. - Tel: +39 0131238971 - Email: info@tubiflessibili.net

Copyright © TUBI FLESSIBILI S.r.l. - All rights reserved. The texts and images are property of Tubi Flessibili S.r.l.
Even partial reproduction of the catalog is prohibited.





TUBIFLESSIBILI

				
Article ID	Inner diameter (mm)	Bending radius (mm)	Working pressure (bar)	Vacuum (mm H ₂ O)
TFN20045-0000B	45	45	2,40	5800
TFN20051-0000B	51	51	2,40	5300
TFN20055-0000B	55	55	2,30	5300
TFN20057-0000B	57	57	2,30	5300
TFN20060-0000B	60	60	2,20	4600
TFN20063-0000B	63	63	2,20	4600
TFN20065-0000B	65	65	2,20	4600
TFN20070-0000B	70	70	2,20	4600
TFN20076-0000B	76	76	2,10	4400
TFN20080-0000B	80	80	2,10	4000
TFN20083-0000B	83	83	2,10	4000
TFN20090-0000B	90	90	2,10	4000
TFN20095-0000B	95	95	2,00	4000
TFN20102-0000B	102	102	1,80	3500
TFN20108-0000B	108	108	1,80	3000
TFN20110-0000B	110	110	1,80	3000
TFN20114-0000B	114	114	1,70	2800
TFN20120-0000B	120	120	1,60	2300
TFN20127-0000B	127	127	1,50	2100
TFN20130-0000B	130	130	1,40	1800
TFN20140-0000B	140	140	1,40	1800
TFN20152-0000B	152	152	1,10	1700
TFN20160-0000B	160	160	0,90	1500
TFN20165-0000B	165	165	0,80	1400
TFN20178-0000B	178	178	0,80	1400
TFN20180-0000B	180	180	0,80	1100
TFN20185-0000B	185	185	0,70	1100
TFN20203-0000B	203	203	0,60	1000
TFN20230-0000B	230	230	0,50	800
TFN20254-0000B	254	254	0,40	700
TFN20305-0000B	305	305	0,20	500

