


TFP SE

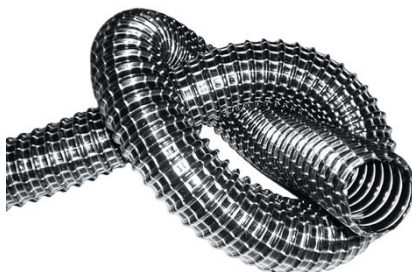

MATERIAL

Flat yarn reinforced double ply PVC ducting. Multifiber helical and axial yarns are laminated between two layers of extra flexible PVC supported by a specially coated spring steel helix giving a high degree of flexibility, integrity and bonding of components

APPLICATION









A truly universal, strong but light ducting for use in a wide range of conditions. Ideal for fumes and dust extraction, its attractive appearance, coupled with its flexibility, make it ideal for both domestical and professional carpets, vacuum cleaners and floor washing machines. Flex life and anti-abrasion properties are aided by the unique construction

TEMPERATURE RANGE

-5° / +85 °C peaks

STANDARD LENGTHS









15 meters. It is possible to supply the hoses in cutted lengths and/or with overmoulded cuffs

|  |  |  |  |  |  |  |  |
|---|---|---|---|---|---|---|---|
| Article ID | Internal diameter (mm) | External diameter (mm) | Bending radius (mm) | Working pressure (bar) | Vacuum (bar) | Weight (kg/m) | Packaging (pcs/box) |
| TFPSE02515000.S | 25 | 31 | 25 | 1.700 | 0.200 | 0.20 | 8 x 15 m |
| TFPSE02815000.S | 28 | 34 | 28 | 1.600 | 0.200 | 0.23 | 8 x 15 m |
| TFPSE03215000.S | 32 | 38 | 32 | 1.500 | 0.200 | 0.28 | 6 x 15 m |
| TFPSE03515000.S | 35 | 41 | 35 | 1.400 | 0.200 | 0.31 | 5 x 15 m |
| TFPSE03815000.S | 38 | 44 | 38 | 1.400 | 0.200 | 0.34 | 4 x 15 m |
| TFPSE04115000.S | 41 | 47 | 41 | 1.400 | 0.180 | 0.37 | 4 x 15 m |
| TFPSE04415000.S | 44 | 50 | 44 | 1.300 | 0.160 | 0.38 | 3 x 15 m |
| TFPSE05115000.S | 51 | 57 | 51 | 1.300 | 0.150 | 0.46 | 3 x 15 m |
| TFPSE06015000.S | 60 | 66 | 60 | 1.200 | 0.140 | 0.51 | 2 x 15 m |





TUBIFLESSIBILI

|  |  |  |  |  |  |  |  |
|---|---|---|---|---|---|---|---|
| Article ID | Internal diameter (mm) | External diameter (mm) | Bending radius (mm) | Working pressure (bar) | Vacuum (bar) | Weight (kg/m) | Packaging (pcs/box) |
| TFPSE06315000.S | 63 | 69 | 63 | 1.000 | 0.140 | 0.53 | 2 x 15 m |
| TFPSE07015000.S | 70 | 76 | 70 | 0.900 | 0.120 | 0.58 | 2 x 10 m |
| TFPSE07615000.S | 76 | 82 | 76 | 0.800 | 0.100 | 0.68 | 2 x 10 m |
| TFPSE08015000.S | 80 | 86 | 80 | 0.700 | 0.090 | 0.83 | 2 x 10 m |
| TFPSE08915000.S | 89 | 95 | 89 | 0.700 | 0.090 | 0.93 | 1 x 10 m |
| TFPSE10215000.S | 102 | 108 | 102 | 0.600 | 0.080 | 1.00 | 1 x 10 m |

